


SHOULDER 社

SAW-FILTER ラインナップと サイズ

S3 (5.0*5.0*1.35mm)

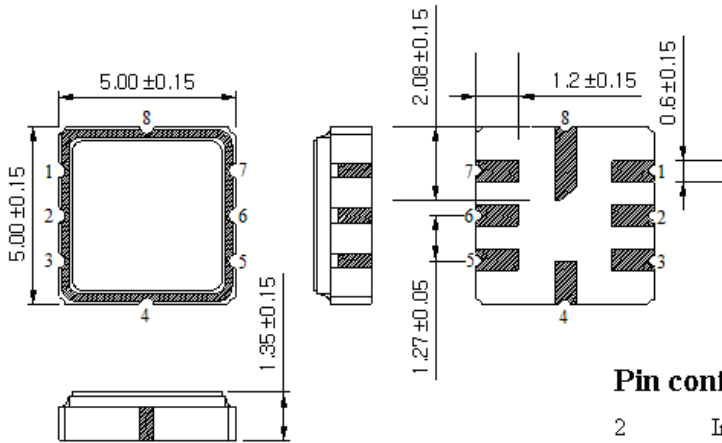


Pin configuration

- 2 Input/ Output
- 6 Output/ Input
- 4,8 Case Ground



S4 (3.8*3.8*1.25mm)

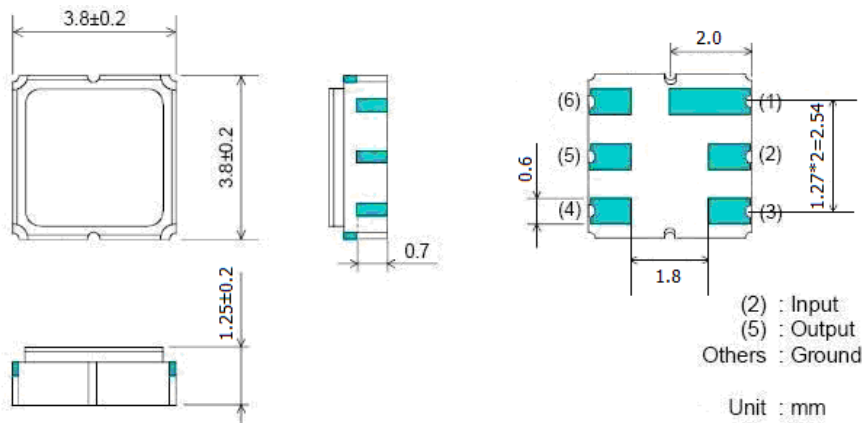


- (2) : Input
- (5) : Output
- Others : Ground

Unit : mm




S-6(3.0*3.0*1.28mm)

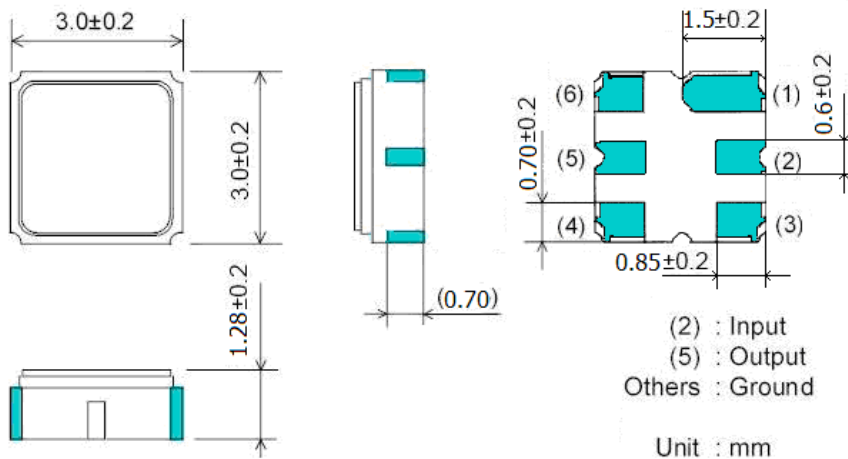

- (2) : Input
- (5) : Output
- Others : Ground

Unit : mm



SHOULDER

SAW-FILTER

★ここに掲載されている物は一部での、詳細は別途問合せ下さい。

代表採用製品	型番	中心周波数 (Mhz)	帯域幅(Mhz)	パッケージサイズ
	F110N	110.592	FO(3db)+/-576min	F11/F11AA/S3
	F110L	110	FO(3db)+/-576min	F11/F11AA/S3
	F110N3	110	109.97-110.06	F16
	F110N5	110.592	110.542-110.642	F16
	F130N	130.38	FO(2db)+/-500min FO(3db)+/-630min	S4
VHF	F169A	169	2(168~170)	F11
VHF	F170A1	170	1(169.5~170.5)	F11
VHF	F170A	170.5	±100 min KHz	F11
VHF	F171	171	Fo±4MHz	F11
VHF	F172A2	172	5(169.5~174.5)	F11
VHF	F177A2	177	5 (174.5-179.5)	F11
VHF	F182A2	182	5 (179.5-184.5)	F11
VHF	F187A2	187	5 (184.5-189.5)	F11
VHF	F192A2	192	5 (189.5-194.5)	F11
VHF	F197A2	197	5 (194.5-199.5)	F11
VHF	F202A2	202	5 (199.5-204.5)	F11
VHF	F207A2	207	5 (204.5-209.5)	F11
VHF	F212A2	212	5 (209.5-214.5)	F11
VHF	F220A	220	3 (218.5-221.5)	S3
VHF	F223A9	223	5 (220.5-225.5)	F11
VHF	F228A9	228	5 (225.5-230.5)	F11
	F243B	243.95	±130	S4/S6
	F245A	245	1 (244.50~245.5)	S3/S4
	F247B	247.45	±130	S4
	F265B	265.55	±130	S6
	F268A9	268	5 (265.5-270.5)	F11
	F482S	482.5	35 (465-500)	S4
	F495C	495	10 (490-500)	F11/S4/S6
	F500E5	500	20 (490-510)	S4
	F505A2	505	10 (500~510)	S6
	F514A	514	8 (510-518)	F11
	F523A	523	8 (519-527)	F11
	F524.5E5	524.5	25 (512-537)	S4
	F526E5	526.5	21 (516-537)	S6
	F530A	530	8(526-534)	F11
	F531E3	531	30(516-546)	S4
	F533E3	533	30(518-548)	S4
	F534E3	534	35(516.5-551.5)	S4
	F544E4	544	20(534-554)	S6
	F547E5	547.5	21(537-558)	S6
	F552S	552.5	35(535-570)	S4
	F549.5E5	549.5	25 (537-562)	S4
	F560A	560	8 (556-564)	S6

SHOULDER

SAW-FILTER

★ここに掲載されている物は一部で
ので、詳細は別途問合せ下さい。

代表採用製品	型番	中心周波数 (Mhz)	帯域幅(Mhz)	パッケージサイズ
	F562A	562	8 (558-566)	S6
	F564E	564	20(554-574)	F11
	F575E5	575	24(564-588)	S6
	F591A3	591	4(589-593)	S4
	F591E	591	30(576-606)	S6
	F596E	596	30(581-611)	S4
	F606.5A2	606.5	14.5(599.5~614)	S6
	F618A	618	8(614-622)	F11
	F620E	620	20(610-630)	S6
	F621E	621	30(606-636)	F11/S4
	F625E	625	30(610-640)	F11/S4
	F626A	626	8(622-630)	F11/S4
	F632E4	632	20 (622-642)	S4
	F632AN1	632	2(631-633)	S4
	F634A	634	8(630-638)	F11
	F636E5	636.6	21(626-647)	S6
	F639A	639	8 (635-643)	S6
	F647E3	647	42 (626-668)	S4
	F650A3	650	4(648-652)	S4
	F650A	650	8(646-654)	S6
	F652.5E4	652.5	24(640.5-664.5)	F11/S6
	F652.5E5	652.5	24(640.5-664.5)	S6
	F652E	652	32(636-668)	S4
	F655E	655	30(640-670)	F11
	F657E5	657.5	21(647-668)	S6
	F660AN1	660	3(658.5-661.5)	F11
	F660A3	660	4(658-662)	F11
	F662.5E4	662.5	25(650-675)	F11
	F666A	666	8(662-670)	S4
	F674A	674	8(670-678)	F11
	F675E5			S6
	F677.5E4	677.5	24(665.5-689.5)	F11/S6
	F682A	682	8(678-686)	F11
	F683E	683	30(668-698)	F11/F11AA/S4
	F687.5E4	687.5	25(675-700)	F11
	F696A3	696	4(694-698)	F11
	F706A	706	8(702-710)	F11
	F707A2	707	18(698-716)	S6
	F714A	714	8(710-718)	F11
	F722A	722	8(718-726)	F11
	F725E3	725	BW3db:50(700-750)	S4
	F736C	736	12(730-742)	F11
	F737A2	737	18(728-746)	S6
	F737E5	737.5	25(725-750)	S6
	F738A	738	8(734-742)	S4/S6
	F738H	738	18(728-746)	S6
	F740AN1	740	3(738.5-741.5)	F11
	F745A3	745	10(740-750)	S6
	F746A2	746	8(742-780)	S4
	F746A	746	8(742-780)	F11/S4
	F746A2	746	8(742-750)	F11
	F751A2	751	10(746-756)	S6
	F751E	751.5	27(738-765)	P6

SHOULDER

SAW-FILTER

★ここに掲載されている物は一部で
ので、詳細は別途問合せ下さい。

代表採用製品	型番	中心周波数 (Mhz)	帯域幅(Mhz)	パッケージサイズ
	F752.5E	752.5	25(740-765)	F11/S6/F11AA
	F754A	754	8(750-758)	F11/S6
	F755A3	755	10(750-760)	F11/S6
	F755AN1	755	3(753.5-756.5)	F11
	F758C	758	12(752-764)	S4
	F760E	760.5	19(751-770)	S6/S4
	F762E5	762.5	25(750-775)	S6
	F764A	764	8(760-768)	F11/S4
	F764A2	764	10(759-769)	F11
	F765A3	765	10(760-770)	S6
	F765E3	765	50(740-790)	F11/S4
	F765E	765.5	20(755.5-777.5)	S4
	F767AN	767	3(765.5-768.5)	S6
	F770AN1	770	3(768.5-771.5)	F11
	F770A	770	8(766-774)	S6/S4
	F770A2	770	12(754-776)	S6
	F775A3	775	10(770-780)	S6
	F775E	775.5	19(766-785)	S6/S4
	F777.5E	777.5	24(765-789)	F11/S6/S4
	F777E	777.5	30(762.5-792.5)	P6
	F778.7E	778.7	24(766.7-790.7)	S6
	F782C	782	12(776-788)	S6/S4
	F785A3	785	10(780-790)	F11/S6
	F785AN1	785	3(783.5-786.5)	F11
	F785E	785	30(770-800)	F11
	F787E	787	22(776-798)	S6
	F794A	794	8(790-798)	S6/S4
	F799C	799	20(789-809)	F11
	F800E5	800	20(790-810)	F11
	F801AN	801	9(796.5-805.5)	F11
	F801E3	801	42(780-822)	S4
	F802A1	802	8(798-806)	S6/S4
	F805A3	803	10(798-808)	F11/S6
	F805E1	805	25(792.5-817.5)	F11/S6
	F806C	806	3db:22	S4/F11
	F806E3	806	36(788-824)	S6
	F808AN	808	4(806-810)	S5
	F808A	808	4(806-810)	S4
	F810E	810	20(800-820)	S6
	F812A			S4/S6
	F815A3	815	10(810-820)	S6
	F815E6	815.5	20(805.5-825.5)	F11
	F815E	815.5	20(805.5-820.5)	F11/S6
	F820AN	820.5	3(819-822)	S6
	F821A	821	4(819-823)	F11
	F825A3	825	10(820-830)	S6
	F827A3	827	9(823-832)	F11
	F827A	827.5	15(820-835)	F11/S6
	F830A3	830	10(825-835)	S6
	F835A3	835	10(830-840)	S5
	F836E1	836.5	25(824-849)	S6
	F836E	836.5	25(824-849)	S6
	F844A2	844	10(839-849)	S6

SHOULDER

SAW-FILTER

★ここに掲載されている物は一部で
ので、詳細は別途問合せ下さい。

代表採用製品	型番	中心周波数 (Mhz)	帯域幅(Mhz)	パッケージサイズ
	F844E3	844	50(819-869)	S4
	F845A3	845	10(840-850)	S6
	F847E	847	30(832-862)	S6
	F855A3	855	10(850-860)	S6
	F855E4	855	30(840-870)	F11/S6
	F860C1	860.5	19(851-870)	S6
	F860C	860.5	19(851-870)	S6/S4
	F860E	860	30(845-875)	S4
	F864AN1	864	3(862.5-865.5)	F11/F11AA/S6/S4
	F864AN	864	2(863-865)	F11/S6
	F865S		64(833-897)	S6
	F865A3	865	3(863.5-866.5)	S6
	F865C	865	10(860-870)	S4
	F866.5A1	866.5	7(863.5-870.5)	S6
	F866A3	866.5	8(862-870)	S6
	F866A2	866	8(862-870)	S6
	F866A	866	4(864-868)	S6
	F869A1	869	7(865.5-872.5)	S6
	F869A2	869	2(868-870)	P2(1411)
	F869AN	869	2(868-870)	S6
	F915C1	915	26(902-928)	S6/S4
	F930.5A	930.5	4(928.5-932.5)	S6
	F925AN2	925	6(922-928)	S6
	F931A	931	4(929-933)	F11/S4
	F931U	931	8(927-935)	S6
	F942E	942.5	35(925-960)	S6
	F9282	928.5	7(925-932 MHz)	S4